

Height Safety

**Mini
Product
Guide**



Retractable Horizontal Lifeline

14664 18m, galvanized steel cable

Unlike any other horizontal lifeline we have ever offered - combining the span flexibility of synthetic-rope lifelines with the durability of fixed-length cable systems. Ideal for hire company use, the Retractable HLL features an integrated shock absorber and can accommodate up to two workers in fall arrest.

[View online](#)

Xplorer Full-Body Harness

48070 XS-S, quick-connect buckles

48071 M-L, quick-connect buckles

48072 XL-XXL, quick-connect buckles

48074 XS-S, quick-connect buckles, with waist pad

48075 M-L, quick-connect buckles, with waist pad

48076 XL-XXL, quick-connect buckles, with waist pad

The Xplorer harness is an incredibly versatile part of your Personal Fall Arrest System. Perfect for a wide range of work-at-height applications in all kinds of industries. With its original design principles coming straight from the climbing world, where a need for comfort is a pre-requisite, the Xplorer harness will keep the user far more comfortable than a conventional harness.

[View online](#)



Webbing Horizontal Lifeline

14663 20m, webbing lifeline

14665 10m, webbing lifeline

A temporary horizontal lifeline designed to be used for restraint or fall arrest applications, the Webbing HLL comes complete with a detachable tensioning handle, O-rings, cross-arm straps, elasticated tool tether and carry bag. Spanning up to 20m the system can accommodate two users at a maximum combined weight of 280kg.

[View online](#)



FABX Self-Retracting Lifeline

The superior technology and craftsmanship that goes into every FABX unit ensures maximum confidence for users while working at height.

Computer-calibrated and serialized braking technology means every unit's torque setting is individually set for optimum performance. The locking mechanism is designed to prevent nuisance lock-ups for increased productivity. The exceptionally lightweight housing makes overhead installation easier.

FABX Leading Edge

10234 10m, galvanised steel cable, and aluminium snap hooks


10238 15m, galvanised steel cable, and aluminium snap hooks

Tested and approved for safe use over an edge with a 5mm radius or above. Always avoid working over an edge where possible.

[View online](#)



10234

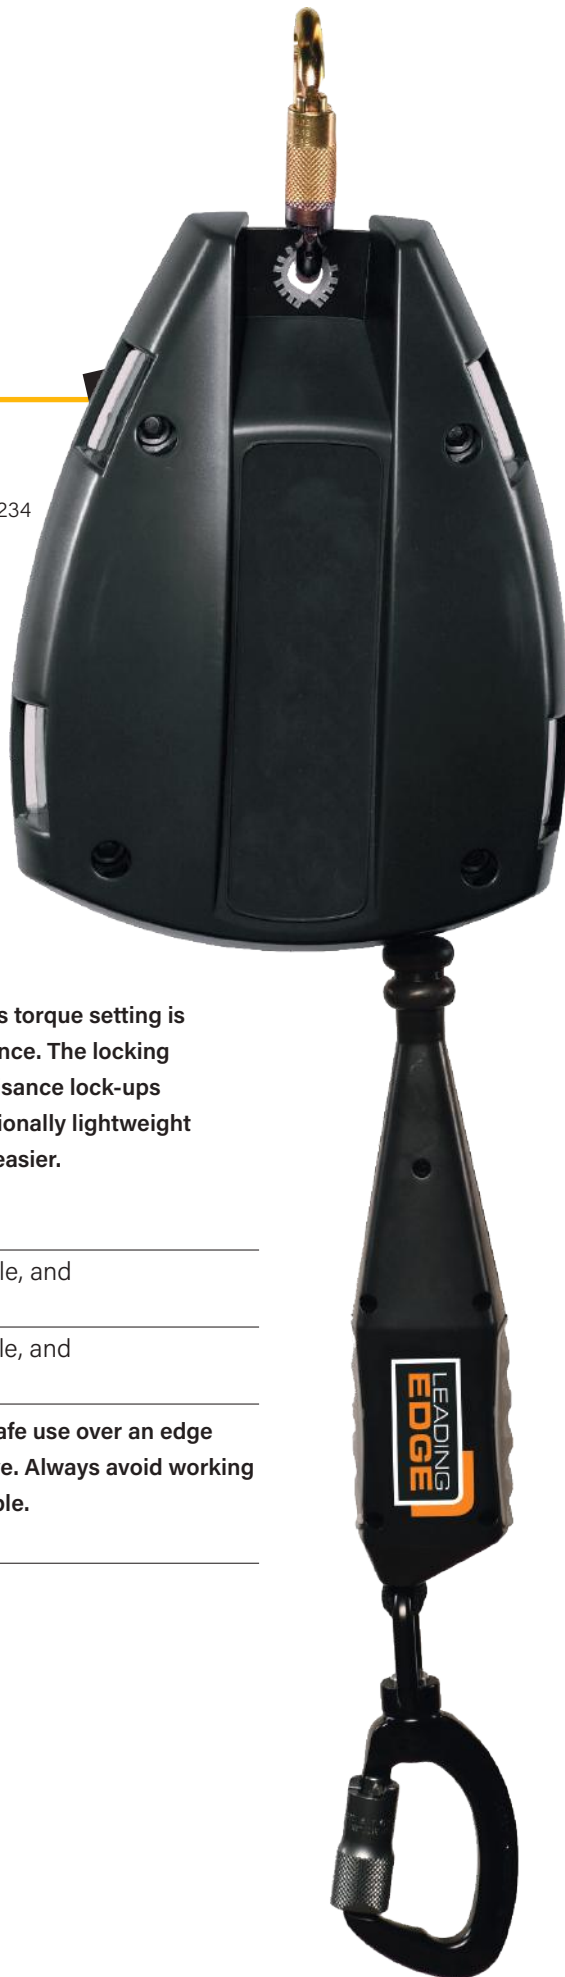

10251



FABX Rescue Recovery

10243 15m, stainless steel cable, and steel snap hook

10248 30m, galvanised steel cable, and steel snap hook

102451 35m, stainless steel cable, and steel snap hook

Functions as a standard FABX self-retracting lifeline, but in the event of a fall, the recovery mechanism can be engaged to raise or lower a fallen worker.

[View online](#)



ATOM-X Self-Retracting Lifeline

10210	1.8m, web lifeline, aluminium snap hook, top karabiner
10213	1.8m, web lifeline, aluminium scaffold hook
10215	Dual 1.8m, web lifeline aluminium scaffold hook
10216	ATOM-Xtreme 1.8m web lifeline, aluminium snap hook
10218	ATOM-Xtreme tie-back 1.8m, web lifeline, steel tie-back hook
10221	ATOM-X ² 1.8m, web lifeline, aluminium scaffold hook
10223	Dual ATOM-X ² 1.8m, web lifeline, aluminium scaffold hook

ATOM-X is the smallest and lightest self-retracting lifeline in its class in the world. With three variants available, it is extremely versatile and can be worn on the person as well as connected to an anchor. ATOM-Xtreme has an internal brake system and ATOM-X² can be connected at foot level.

[View online](#)

FABX Longer Lifeline

10246	30m, galvanised steel cable, and aluminium carabiner
10247	30m, Dyneema [®] rope, and aluminium carabiner
10252	40m, stainless steel cable, and aluminium carabiner
10253	40m, Dyneema [®] rope, and steel snap hook

The larger FABX housing is designed to accommodate extra long cable lifelines.


[View online](#)

FAB3W Self-Retracting Lifeline

10224	3m, web lifeline, aluminium swivel karabiner
10225	3m, web lifeline, indicating steel swivel karabiner
10226	4m, web lifeline, indicating steel swivel karabiner

FAB3W is the lightest and smallest member of the FABX fall arrest block family. Available in 3m, 3.5m and 4m lengths FAB3W is so light that it can be worn on the person, utilises Dyneema[®] webbing and is available with multiple connector options.

[View online](#)

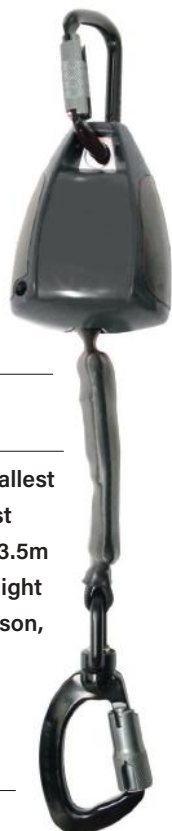

Series 4-Point Safety Harness

38047 M-L, front & rear D-rings, waistpad, quick-connect buckles, and shoulder pads

Designed for comfort, the Guardian Series, 4-point safety harness range is the perfect fall and restraint harness solution. With rear and front attachment points, and a waistbelt with side D-rings, the harnesses are ideal for utility workers, arborists and general industry. Series harnesses are fully adjustable and available in 3 sizes to ensure a comfortable fit. Certified for use up to 140kg, the harnesses can be safely worn with tools and equipment. The harnesses feature water repellent contrasting webbing, dual impact indicators, velcro label cover and adjustable shoulder and leg straps. Available options include shoulder pads and quick-connect or pass-through buckles.

[View full range online](#)



38047



Truama Strap

10733

Reducing the effects of suspension trauma, this lightweight device can be fitted to any Guardian harness.

[View online](#)



38053

Series Rescue Safety Harness

38053 M-L, front & rear D-rings, quick-connect buckles, shoulder pads, and rescue strop

The Guardian Series rescue safety harnesses are ideal for confined space use. Series harnesses are fully adjustable and available in 3 sizes to ensure a comfortable fit. Certified for use up to 140kg, the harnesses can be safely worn with tools and equipment. The harnesses feature water repellent contrasting webbing, dual impact indicators, velcro label cover and adjustable shoulder and leg straps. Available options include shoulder pads and quick-connect or pass-through buckles.

[View full range online](#)



38013

Series 2-Point Safety Harness

38013 M-L, front & Rear D-rings, and quick-connect buckles

The Guardian Series, 2-point safety harness range is the perfect fall and restraint harness solution. With rear and front attachment points, the harnesses are ideal for construction, roofing, contracting and general industry. Series harnesses are fully adjustable and available in 3 sizes to ensure a comfortable fit. Certified for use up to 140kg, the harnesses can be safely worn with tools and equipment. The harnesses feature water repellent contrasting webbing, dual impact indicators, velcro label cover and adjustable shoulder and leg straps. Available options include side D-rings and quick-connect or pass-through buckles.

[View full range online](#)

The Guardian Fall Arrest Lanyard range offers the user a choice of a single leg or dual leg adjustable external shock pack lanyard or a fixed-length internal shock lanyard in two length options. These high quality lanyards are ideal for all fall arrest scenarios.

G-PAL Internal Shock Absorbing Lanyard

36020	1.8m, adjustable webbing, steel scaffold hook
36022	1.8m, adjustable webbing, steel snap hook
36032	1.8m, adjustable webbing, aluminium scaffold hook
36033	1.8m, adjustable webbing, aluminium karabiner
36034	1.8m, adjustable webbing, aluminium snap hook
36024	Dual .4m, adjustable webbing, steel scaffold hooks
36026	Dual 1.4m, adjustable webbing, steel snap hooks
36035	Dual 1.4m, adjustable webbing, aluminium scaffold hooks
36036	Dual 1.4m, adjustable webbing, aluminium karabiners
36037	Dual 1.4m adjustable webbing, aluminium snap hooks



36026



36020

G-SAL External Shock Absorbing Lanyard

36004	1.8m, adjustable webbing, steel scaffold hook
36006	1.8m, adjustable webbing, steel snap hook
36008	1.8m, adjustable webbing, aluminium scaffold hook
36014	1.8m, adjustable webbing, aluminium karabiner
36016	1.8m, adjustable webbing, aluminium snap hook
36005	1.8m, adjustable webbing, steel scaffold hooks
36007	Dual 1.8m, adjustable webbing, steel snap hooks
36009	Dual 1.8m, adjustable webbing, aluminium scaffold hooks
36015	Dual 1.8m, adjustable webbing, aluminium karabiners
36017	Dual 1.8m, adjustable webbing, aluminium snap hooks



G-LRA Restraint Lanyard

36030	1.3m - 1.8m, adjustable webbing, steel snap hook
36031	1.3m - 1.8m, adjustable webbing, steel scaffold hook
36038	1.3m - 1.8m, adjustable webbing, aluminium snap hook
36040	1.3m - 1.8m, adjustable webbing, aluminium scaffold hook
36041	1.3m - 1.8m, adjustable webbing, aluminium karabiner
36042	1.3m - 1.8m, adjustable webbing, steel karabiner

Drop Prevention

Quick-Switch® Tool Transfer System Starter Kit

- 42125
- 4 x Quick-Switch® Links
 - 4 x Quick-Switch® Dock
 - 1 x Quick-Switch® Key on bungee tether
 - 1 x Quick-Switch® Wrist Cuff

Quick-Switch® is the only hands-free tool transfer system in the world that will maintain **100%** connection at all times.

[View full range online](#)




42125

Easier. Faster. Safer.

Quick-Switch® - has it clicked yet?

Fall Clearance

Self-Retracting Lifelines

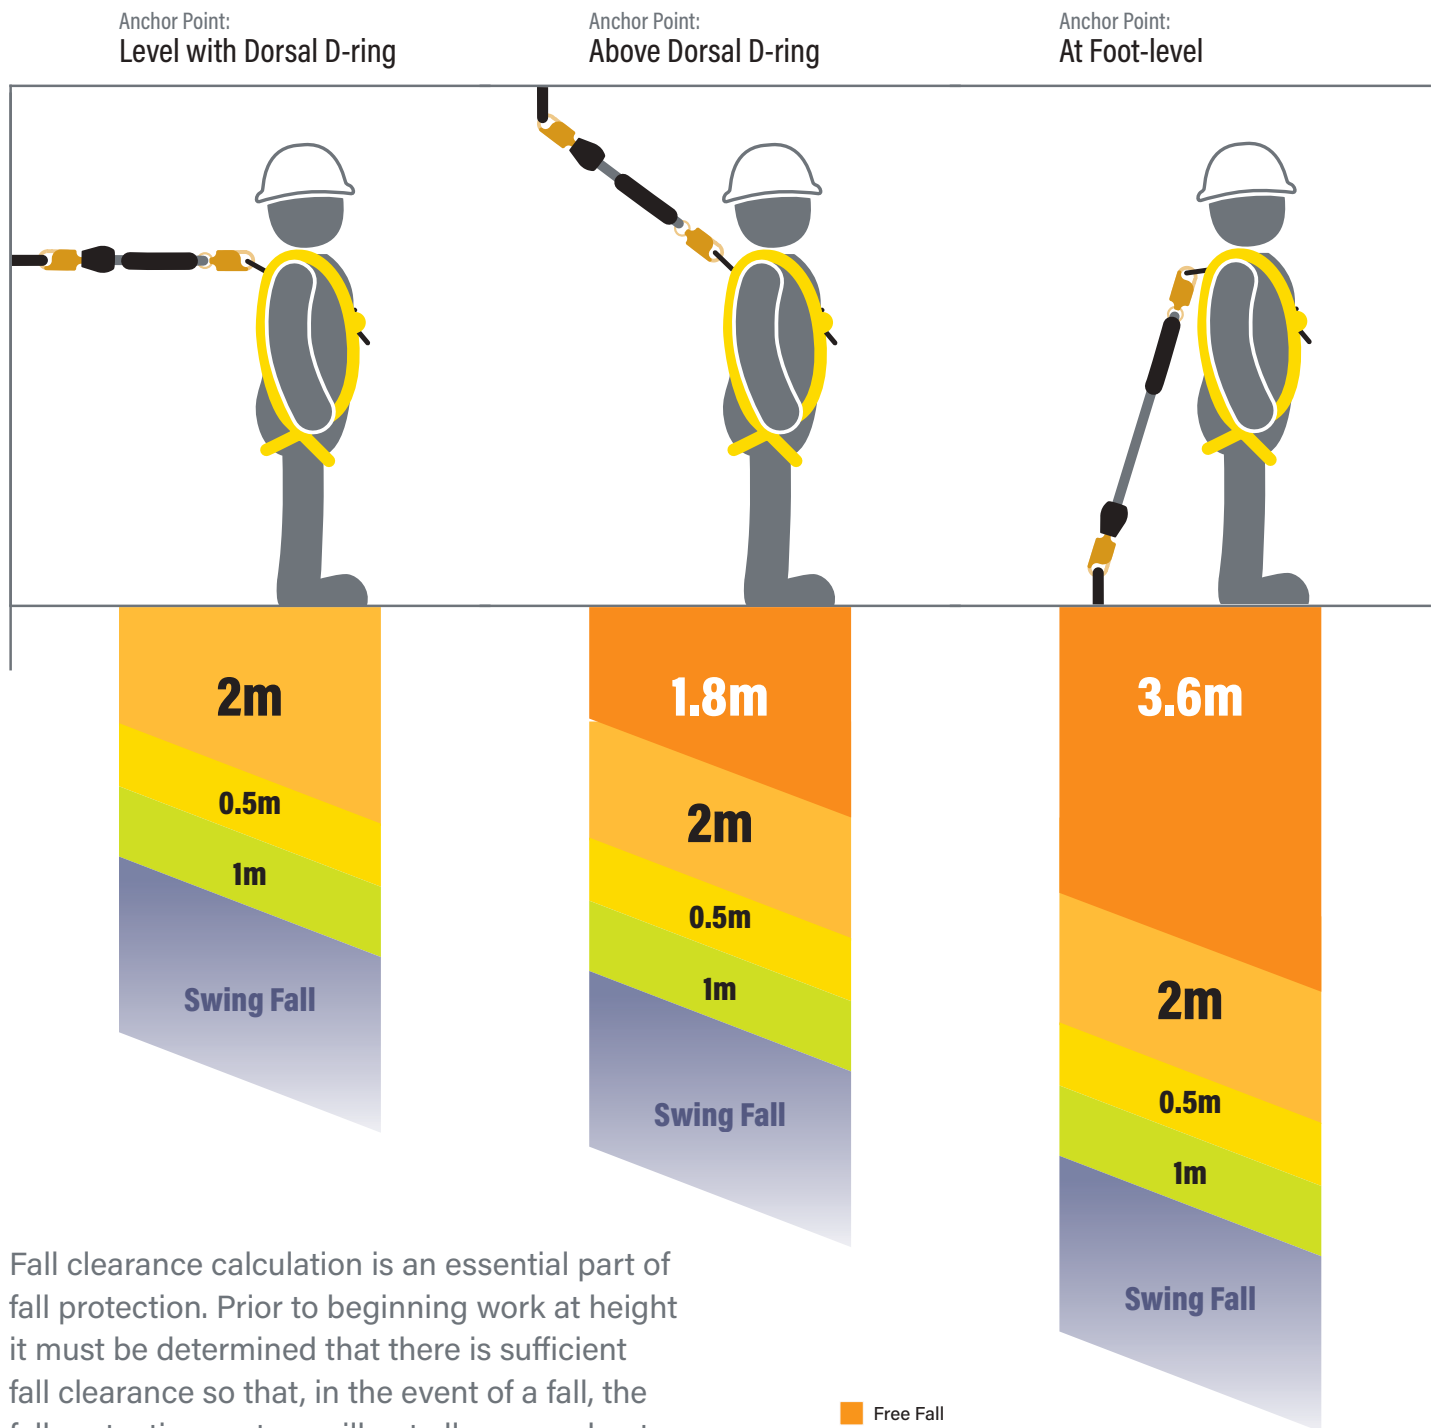

Fall clearance calculation is an essential part of fall protection. Prior to beginning work at height it must be determined that there is sufficient fall clearance so that, in the event of a fall, the fall protection system will not allow a worker to impact the ground or any other obstruction.

[View our fall clearance calculator online](#)

- Free Fall
- Maximum Arrest Distance
- Harness Stretch
- Safety Factor
- Swing Fall

**HEIGHT SAFETY.
SIMPLIFIED.**

To see our entire range of height safety products, training courses, and engineered solutions, visit our web site



guardianfall.com

+44 (0) 1795 580 333
enquiries@guardianfall.com